

TELEPHONES LE LAS (FRANCE Head Office)


Tel: 0033 1 48766262

E-mail: lelas@lelas.fr

Fax: 0033 1 48768304

Website : www.lelas.fr

All screws are stainless-steel only

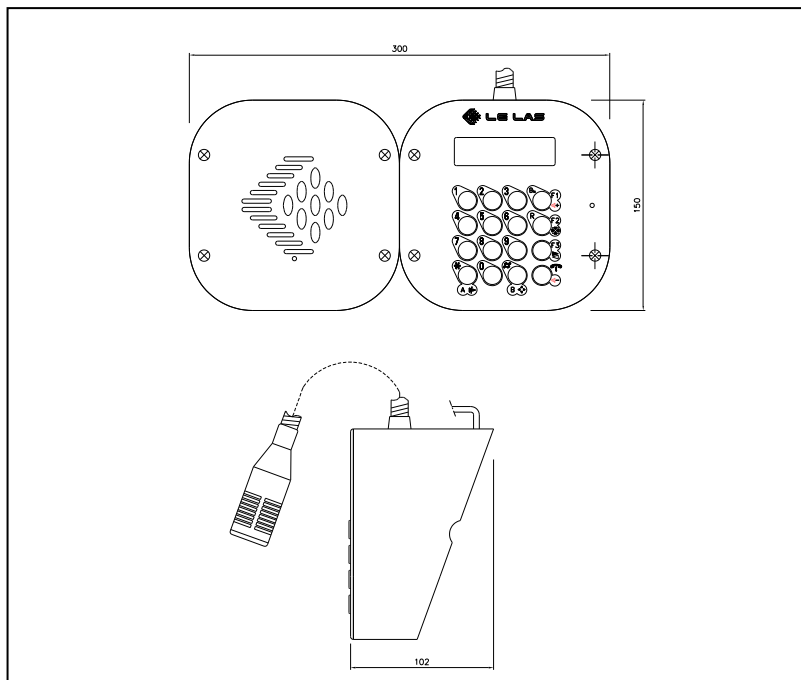

VoIP desk master station
Hands free type
Keypad/display
Desk/wall mounting
NCH202P4C9LX

Electrical Characteristics:

Direct current supply : POE
Conversation mode : full duplex or push-to-talk

Material/Color : cast aluminium / RAL2003
Microphone : electret flexible microphone
Loudspeaker : 5W
Mounting: desk/wall mounting
Dimension : 300 X 150 X 102 mm
Weight : 2.4 kg
IP-rating : IP66
Max. / min. amb. Temp : -10 °C / + 70 °C

Cable type : Cat5e network cable

VOIP Characteristics:

Voice and Media Middleware

- Certified SIP Signalling Stack
- Feature Rich Telephony Application
- SIP, RTP, RTCP, STUN, NTP
- Stand Alone P2P and Proxy Infrastructure Modes
- SIP Failover Server Support
- Analog Audio Subsystem
- Consilient Voice Processing Subsystem

Telephony Features

- Hotline, Intercom, Push-to-Call Modes

Multicast Audio Paging (MCPG) Module

- One-to-Many multicast Audio Paging
- Multicast RTP Support

Consilient Voice Processing Subsystem

- G.711a, G.711u, G.736-32, G721-RFC3551, iLBC, G.722
- AEC (Acoustic Echo Canceller)
- DTMF Detect and Generate
- Call Progress Tones

webUI Module

- Complete Web Interface for Configuration
- Login Authentification

