

Features




- Working Temperature: -40°C ~ +55°C.
- High quality SMT LED and Meanwell Driver.
- Light-weight design by aircraft aluminum.
- Heavy-duty and high impact resistance.
- Three connection cable entry points.
- Replaceable LED board and drivers.
- Integrated junction box for driver with emergency back up.
- Dimmable and battery back up function available.
- Marine rating powder coated appearance treatment.
- Up to 5 years limited warranty option.
- Emergency Battery back up to three hours.
- Various installation ways for different applications.
- Glass lens or Glass with polycarbonate lens to make bigger beam angle.



Dimension Unit: mm or inch




D2 Series

NPT3/4 or M25



This structure type with bracket, flat glass and optics lens to generate 40°, 60°, 90° and 120° light distribution.


D Series




This structure type with bracket, flat glass and optics lens to generate 40°, 60°, 90° and 120° light distribution.

Mounting

No.1: Ceiling Mounting

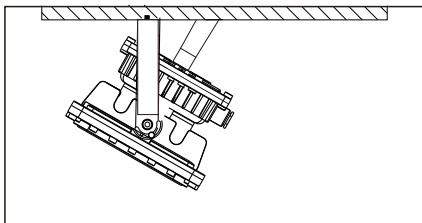

No.2: Wall Mounting

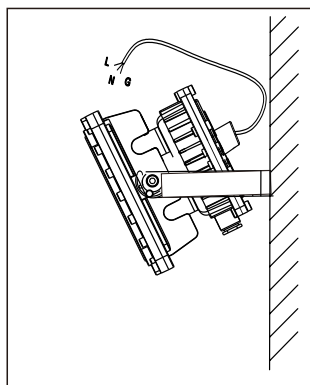

No.3: Pole Mounting

