

HAZARDOUS LOCATION SERIES HL60LV

480 VOLT 3-PHASE NEMA 4/4X AIR CONDITIONERS



NEMA
TYPE 12, 3R AND
4/4X
MAINTAINED

U.S. Patent No.
9,157,670 B2



Model	NEMA Rating	UL/CUL Listed or Recognized	BTU/H Capacity	95/95 Rating BTU/H	Ambient Temp.				Volts	Hz	Running Amps 125°F/125°F	Pressurized Compartment Volume cu. ft.	Air Leakage @ 0.5 i.w.g. Pressure CFM	Approx. Weight	
					°F		°C							Lbs.	Kg.
					Max.	Min.	Max.	Min.							
K3A6C24HL60LV	4/4X	Listed	24000	21600	125	-20	52	-28	480	60	10.0	18.0	0.4	328	150

Rating is shown for operation at maximum ambient temperature.

STANDARD FEATURES


All models UL Listed per UL 484, Special Purpose Air Conditioners
All models UL Recognized per NFPA 496: 2013, Purged and Pressurized Enclosures for Electrical Equipment
Meets NEC Class I Division 1, Groups A, B, C & D and Class I, Zone 1, Groups IIA, IIB plus hydrogen and IIC Hazardous Locations when used with an approved Type X Purge System on the electrical enclosure
Meets NEC Class I Division 2, Groups A, B, C & D and Class I, Zone 2, Groups IIA, IIB plus hydrogen and IIC Hazardous Locations when used with an approved Type Z Purge System on the electrical enclosure
Temperature Classification is T-4, 275°F/135°C
Maintains NEMA Type 12, 3R & 4/4X Ratings per UL 50, Cabinets and Boxes
Closed-Loop Cooling
Compressor Short Cycle Protector
Filter
Interior and Exterior Purge Connections
Internal Corrosion Protection
Painted Condenser and Evaporator Coils
Pressure Compensation Terminal Block
Programmable Temperature Alarm
Programmable Thermostat
Shock and Vibration Resistance
Stainless Steel Shell
Zero ODP Refrigerant

ACCESSORIES AND OPTIONS


Enclosure Heater
Filter Recoating Adhesive
Lead-Lag Controller
Remote Monitoring
Remote Thermostat Relay
Replacement Filters

Find additional information on this model at kooltronic.com, or use the Technical Documents QR code below.

Technical Documents

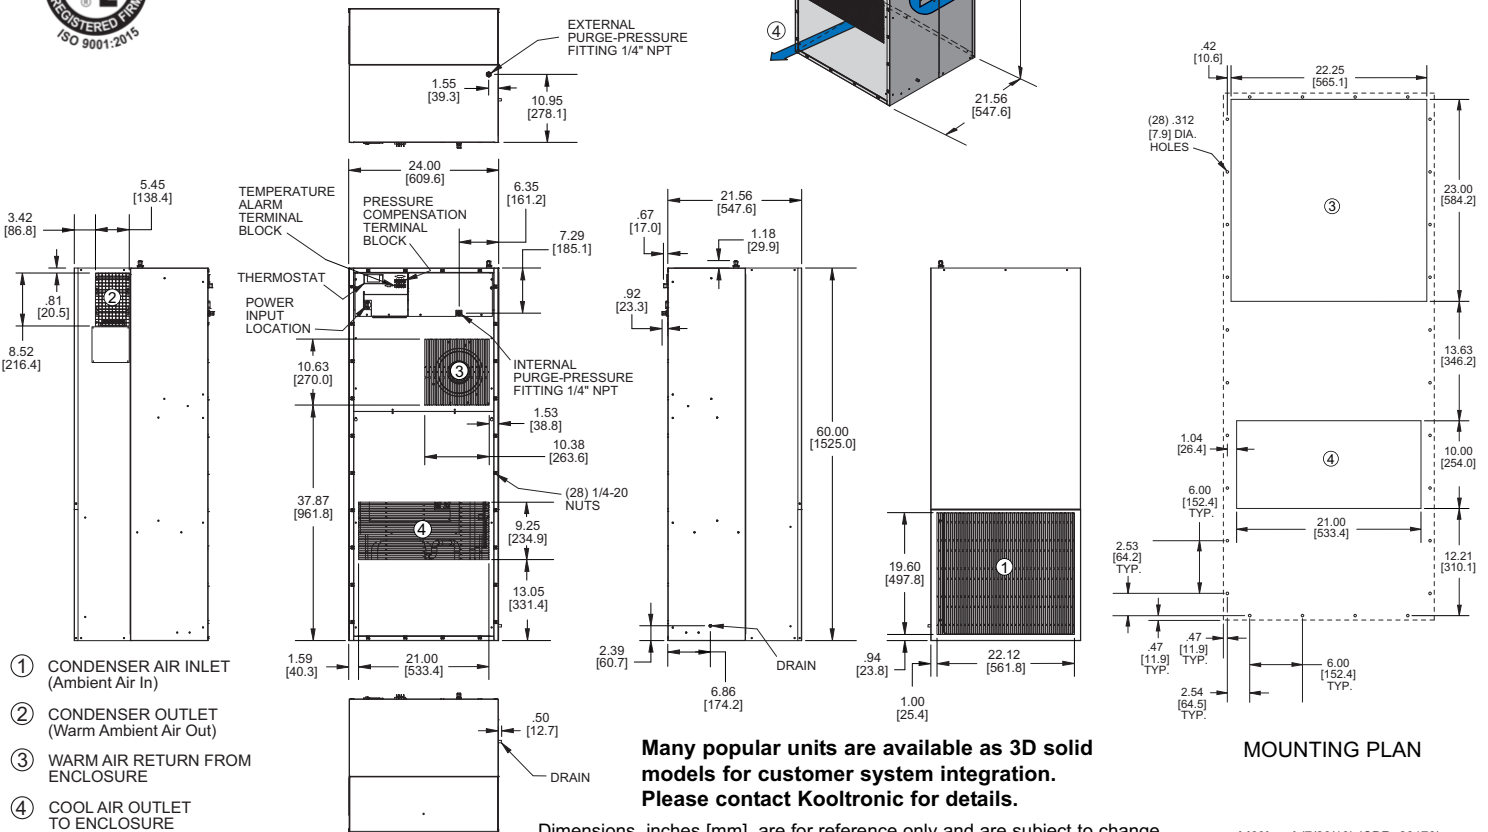

hl60L.qxd (7/26/19) (CDR: 20179)

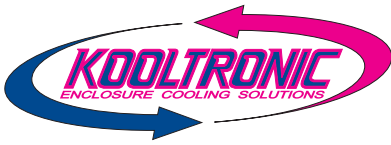

HAZARDOUS LOCATION SERIES HL60LV

480 VOLT 3-PHASE NEMA 4/4X AIR CONDITIONERS


DESCRIPTION

Robust engineering, industrial-grade construction and UL Listing are the reasons that the Kooltronic **Hazardous Location Series** Air Conditioners provide the durability and safety required by hazardous location applications.

Kooltronic **Hazardous Location Series** Air Conditioners are ideal for:

- Offshore oil rigs, onshore oil company offices and refineries
- Petrochemical sites and propane fill-up stations
- Paint and varnish storage or processing plants
- Grain alcohol processors or storage sites
- Munitions plants or armories
- PVC or plastics plants and processing plants
- Recycling plants
- Furniture refinishing/stripping workshops
- Fertilizer plants
- Hazardous materials storage

PERFORMANCE

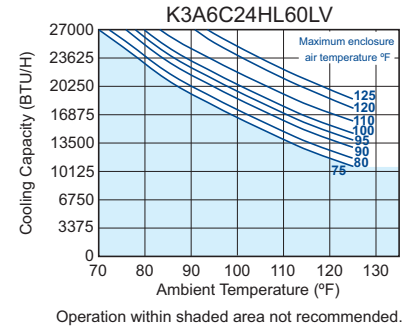

FEATURES AND BENEFITS (STANDARD)

All models UL/CUL Listed and Recognized, a standard of safety.
CFC-free refrigerant provides a zero ozone depletion potential.
Closed-loop cooling provides stable temperature control while excluding dust and humidity from the electrical enclosure.
Compressor short cycle protector extends compressor life.
Condenser filtration to maintain peak thermal performance extends compressor life.
Pressure compensation terminal block allows user to attach auxiliary pressure supply.
Programmable temperature alarm to alert if early action required.
Programmable thermostat capable of remote monitoring and control.
Interior and exterior purge connections offer versatility and convenience.
Internal corrosion protection to increase reliability in hostile environments.
NEMA 12, 3R & 4/4X ratings for compatibility with electrical enclosure ratings.
Stainless steel shell for NEMA 4X corrosive environments.
All models are designed to withstand shock and vibration in two different planes for a minimum of 4 hours per plane at 1G acceleration.
Both evaporator and condenser coils are epoxy coated, prolonging unit life.
Type X and Z purge fittings for simple connection to enclosure purge system.

FEATURES AND BENEFITS (OPTIONAL)*

Enclosure heater eliminates damaging condensation, increasing reliability of electrical enclosure components.
Lead-lag control for two air conditioners provides for capacity control, and alternates usage, increasing reliability.
Remote monitoring provides temperature data for warning of early action required.
Remote thermostat relay for control by a user-supplied control system.

Special paint finishes*

*Contact KOOLTRONIC for more information.

REPLACEMENT FILTERS

The HL60LV Filter Part No. is 2023F (27.75" 20.38" x 0.34" [704.8mm x 517.6mm x 8.6mm])