




RESPONDER RIGHT ANGLE

Model#510304 | Alkaline Responder R/A LED

**OPTIMAL BRIGHTNESS,
SAFETY AND WEIGHT
FOR CUTTING THROUGH
DARKNESS, SMOKE AND DUST**



**DESIGNED FOR THE DEMANDING NEEDS
AND ENVIRONMENTS OF THE FIRE SERVICE,
SEARCH AND RESCUE AND EMS.**

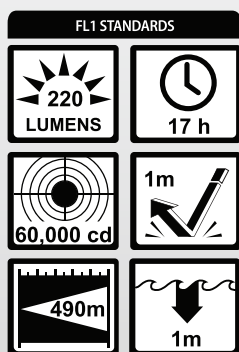

SPECIFICATIONS

POWER SOURCE: 6 AA Alkaline Batteries
LIGHT SOURCE: Advanced LED Technology
LIGHT OUTPUT: 220 Lumens
PEAK BEAM INTENSITY: 60,000 candela
BEAM DISTANCE: 490 Meters
RUN TIME: 17 Hours (alkaline battery pack)
WEIGHT: 1 lb. with alkaline battery pack
LENGTH: 2.5 in. **WIDTH:** 3 in. **HEIGHT:** 7 in.
COLORS: Safety Orange
Models and Accessories on Back

SAFETY RATINGS

Intrinsically Safe
UL Protection Methods
UL 913 CSA C22.2 No 157
Class I, II, III, Division 1, Groups A - G
Class I, II, III, Division 2, Groups A - G
Operating temp code T3
NFPA 70 504.2 (2008)

MODELS

#510304



ACCESSORIES

510201-N: Lithium Ion replacement battery pack

510220: Charger base only

510202: Alkaline battery tray

510180: 12/24V DC Charger cord

510181: 120V AC Charger cord

510182: Euro/Int'l AC Charger cord