


Features

- Working Temperature: -40°C ~ +55°C.
- High quality SMT LED and Meanwell Driver.
- Light-weight design by aircraft aluminum.
- Heavy-duty and high impact resistance.
- Three connection cable entry points.
- Replaceable LED board and drivers.
- Integrated junction box for driver with emergency back up.
- Dimmable and battery back up function available.
- Marine rating powder coated appearance treatment.
- Up to 5 years limited warranty option.
- Emergency Battery back up to three hours.
- Various installation ways for different applications.
- Glass lens or Glass with polycarbonate lens to make bigger beam angle.

Light Distribution

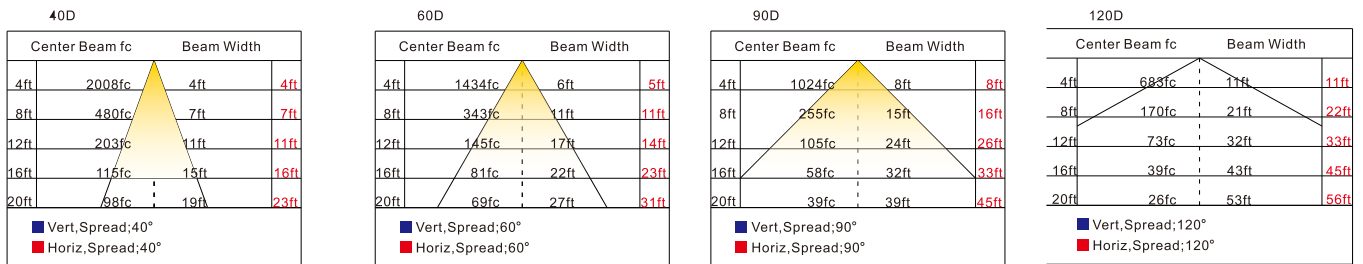

Specification


Product Number	Wattage	Color Temperature	Voltage	Lumens	Warranty	CRI
EX-20W B2YZDA	20	2200K-7000K	AC100-277V(by driver or by IC) Or DC12-48V	2800	5 years	80
EX-40W B2YZDA	40			5600		
EX-60W BYZDA	60		AC100-277V(by driver or by IC) Or DC12-48V Or AC200-480V(<65W)	8400		
EX-80W BYZDA	80			11200		
EX-100W B3YZDA	100		AC100-277V(by driver or by IC) Or DC12-48V Or AC200-480V	14000		
EX-120W B3YZDA	120			16800		
EX-150W B3YZDA	150			21000		
EX-200W B3YZDA	200			28000		
EX-250W B4YZDA	250			35000		
EX-300W B4YZDA	300			42000		
EX-350W B4YZDA	350			49000		
EX-400W B4YZDA	400			56000		

Packing Information


Model	Quantity/Carton	Length(cm)	Width(cm)	Height(cm)	Net weight(kg)	Gross weight(kg)
B	1	38.6	33	22	4.4	5.5
B2	1	36	35.4	26	3.5	5
B3	1	48	46	26.5	8.2	10.5
B4	1	53	53	44	18.8	21.5

Dimension


Model B2

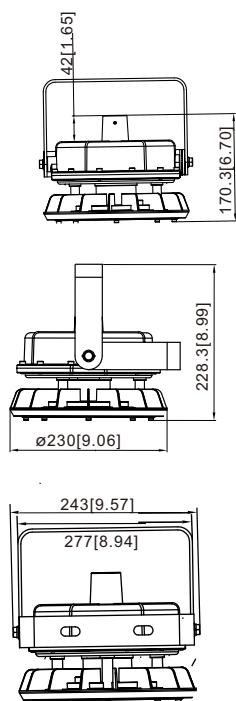


Model B

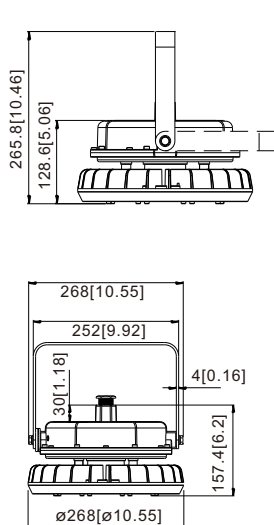

Model B3

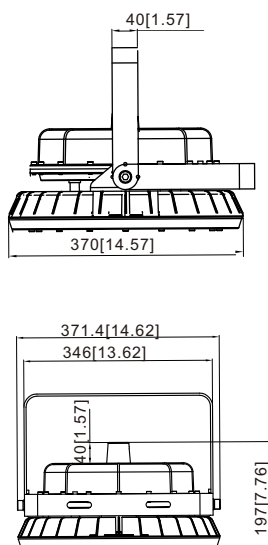


Model B4

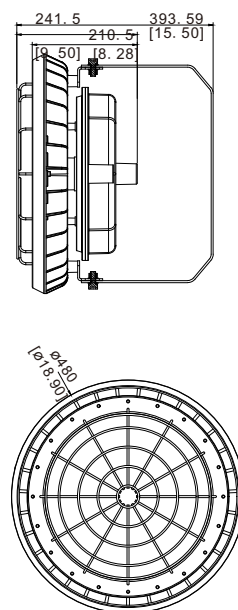


Mounting


No.1: Ceiling Mounting

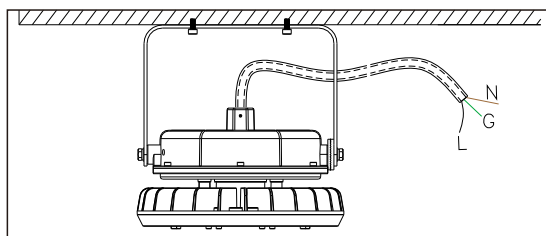


No.2: Wall Mounting




No.3: Pole Pendant




No.4: Hook Pendant

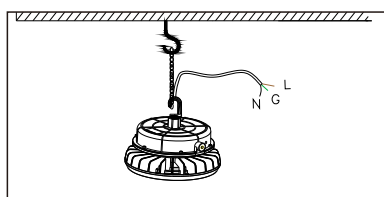


No.6: Arm Mounting by Opening Driver Box

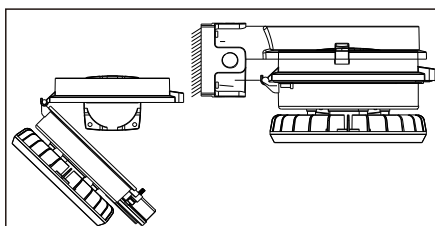

No.5: Ceiling Mounting by Opening Driver Box

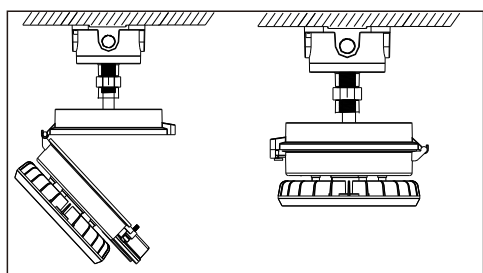

No.7: Stanchion Mounting



No.8: Wall Mounting

