

Specification

Model	Wattage	CCT	Voltage Options	Lumens	Warranty	CRI	Emergency Time(Optional)
EX-20W I2YZDA	20	2200K-7000K	AC100-277V AC200-480V DC12-36V	2800	5 years	>70	3 hours
EX-40W I2YZDA	40			5600			
EX-60W I2YZDA	60			8400			
EX-60W I4YZDA	60			8400			
EX-80W I4YZDA	80			11200			
EX-100W I4YZDA	100			14000			
EX-120W I4YZDA	120			16800			


"I2, I4"=Product code "Y"=D or N: Dimmable or Non-dimmable "Z"=CCT, from 2200~7000K.

"D"=Beam angle, D40 for 40°, D60 for 60°, D90 for 90°, D120 for 120°. A for cover info., blank for flat cover, C spherical cover.

Packing Information


Model	Quantity/ Ctn	Length(cm)	Width (cm)	Height(cm)	Net weight(kg)	Gross weight (kg)
I2	1	77	34	26.5	12	14
I4	1	136	34	26.5	18.5	21.5

Light Distribution

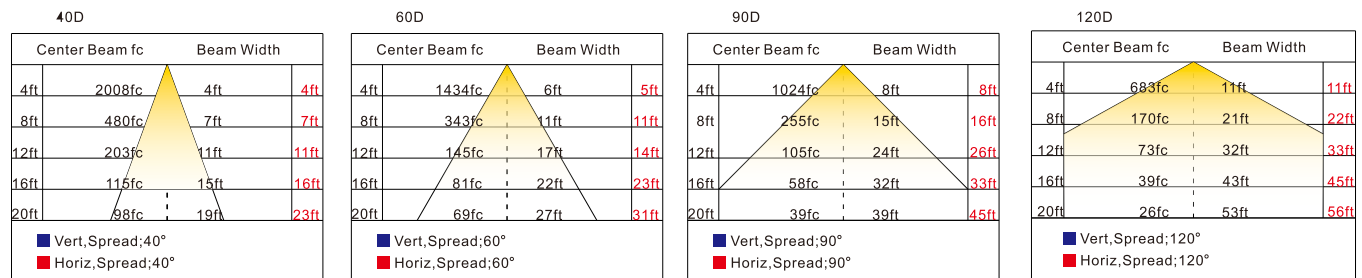


Dimension

Unit: mm or inch

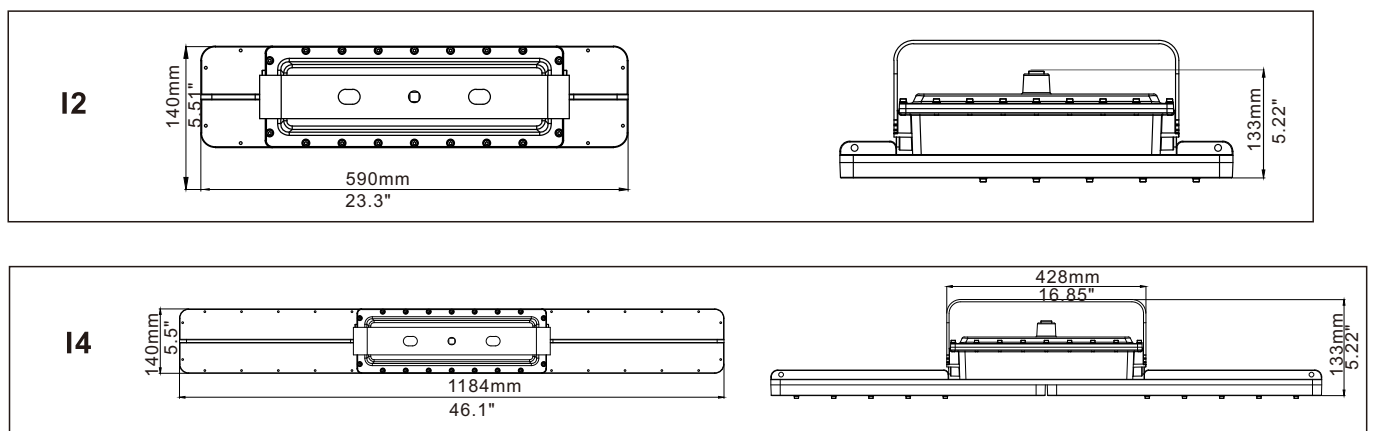


Mounting


No.1 Ceiling Mounting

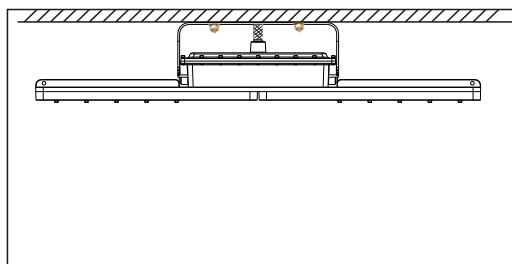


No.2 Pole Bracket Mounting

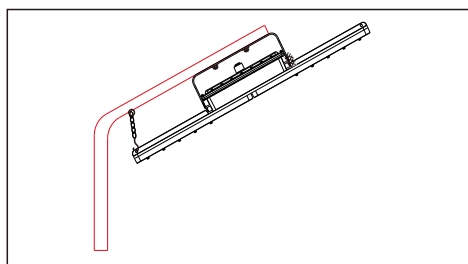


No.3 Wall Mounting



No.4 Chain Mounting

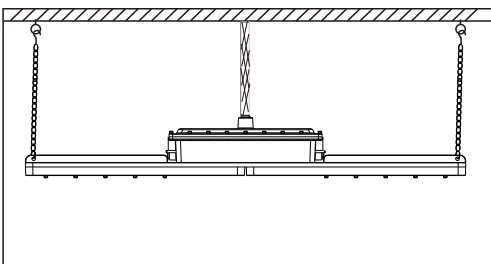

No.5 Pole Pendant Mounting

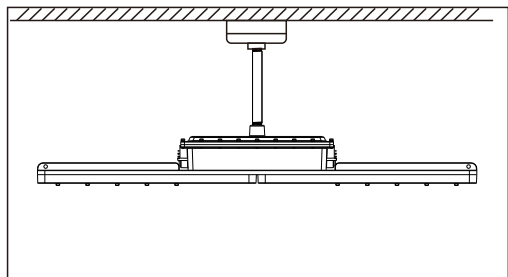

Accessories

Junction Box



Bracket



Straight Pipe



Chain



Metal Conduit



Bended Pipe



12

